

 **YAMAHA**

YES! YAMAHA



**MAKE THE
STREETS YOUR
PLAYGROUND.**

SS 125
SPORT IT OUT!

SS 125



DYNAMIC SPORTY GRAPHICS



AIR FLOW FILTER FOR ENGINE EFFICIENCY



SPORT INSPIRED ENGINE COWL



STYLISH MUFFLER



CONVENIENT RETRACTABLE FOOTREST



DU METAL FRONT FORK FOR SMOOTHER SHOCK ABSORPTION



Black Red




Blue Black

Yamaha SS 125 Specifications

Overall length x width x height	1995x730x1110mm
Seat height	795mm
Wheelbase	1295mm
Minimum ground clearance	155mm
With Oil & Fuel	125Kg
Engine type	Air cooled 4-stroke, SOHC
Cylinder layout	Forward-inclined single cylinder
Displacement	123cm ³
Bore x Stroke	54.0 x 54.0mm
Compression ratio	10.0:1
Maximum output	11PS / 7500rpm (8KW@7500rpm)
Maximum torque	10.4Nm / 6,500rpm
Starting method	Electric starter and kickstarter
Lubrication type	Wet sump
Engine oil volume	1 L
Fuel tank volume	13.6 L
Fuel supply	Carburettor
Ignition type	CDI
Battery	12V - 5AH
Head light	12V 35/35W Halogen bulb
Clutch type	Wet, multiple-disc
Transmission type	5 gear constant mesh
Gear ratios	1st - 33/11 (3.000) 2nd - 32/18 (1.778) 3rd - 25/19 (1.316) 4th - 23/22 (1.045) 5th - 21/24 (0.875)
Frame type	Diamond tubular type
Caster / trail	26.0 degree / 90.0 mm
Tyre size (front / rear)	2.75 - 18 4PR / 3.00 - 18 6PR
Brake type (front / rear)	Disk / Drum
Suspension (front / rear)	Telescopic fork / Swingarm

Authorized Dealer

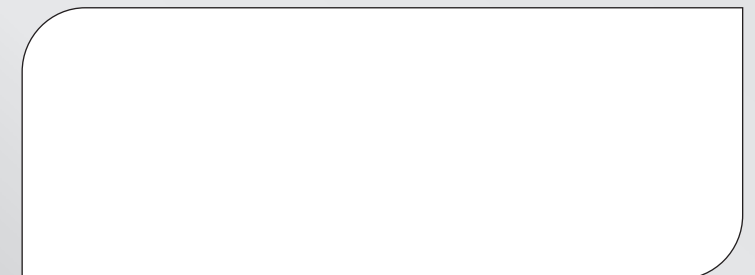

Apparel & Accessory



The specifications and design of the Motorcycle shown here may vary according to the requirements and are subject to change without prior notice. Colours shown may not match the actual colours due to printing limitations.

India YAMAHA Motor Pvt. Ltd., A-3, Surajpur Indl. Area, Noida-Dadri Road, Surajpur, Dist. Gautam Budh Nagar, U.P.
Toll Free No.: 1800 160 180 www.yamaha-motor-india.com